


Atmospheric gas-fired hot water heating boiler
Rated input: 65 to 200 MBH

VIESSMANN

VITOGAS 50

*Gas-fired hot water heating boiler
in an economical and compact design*

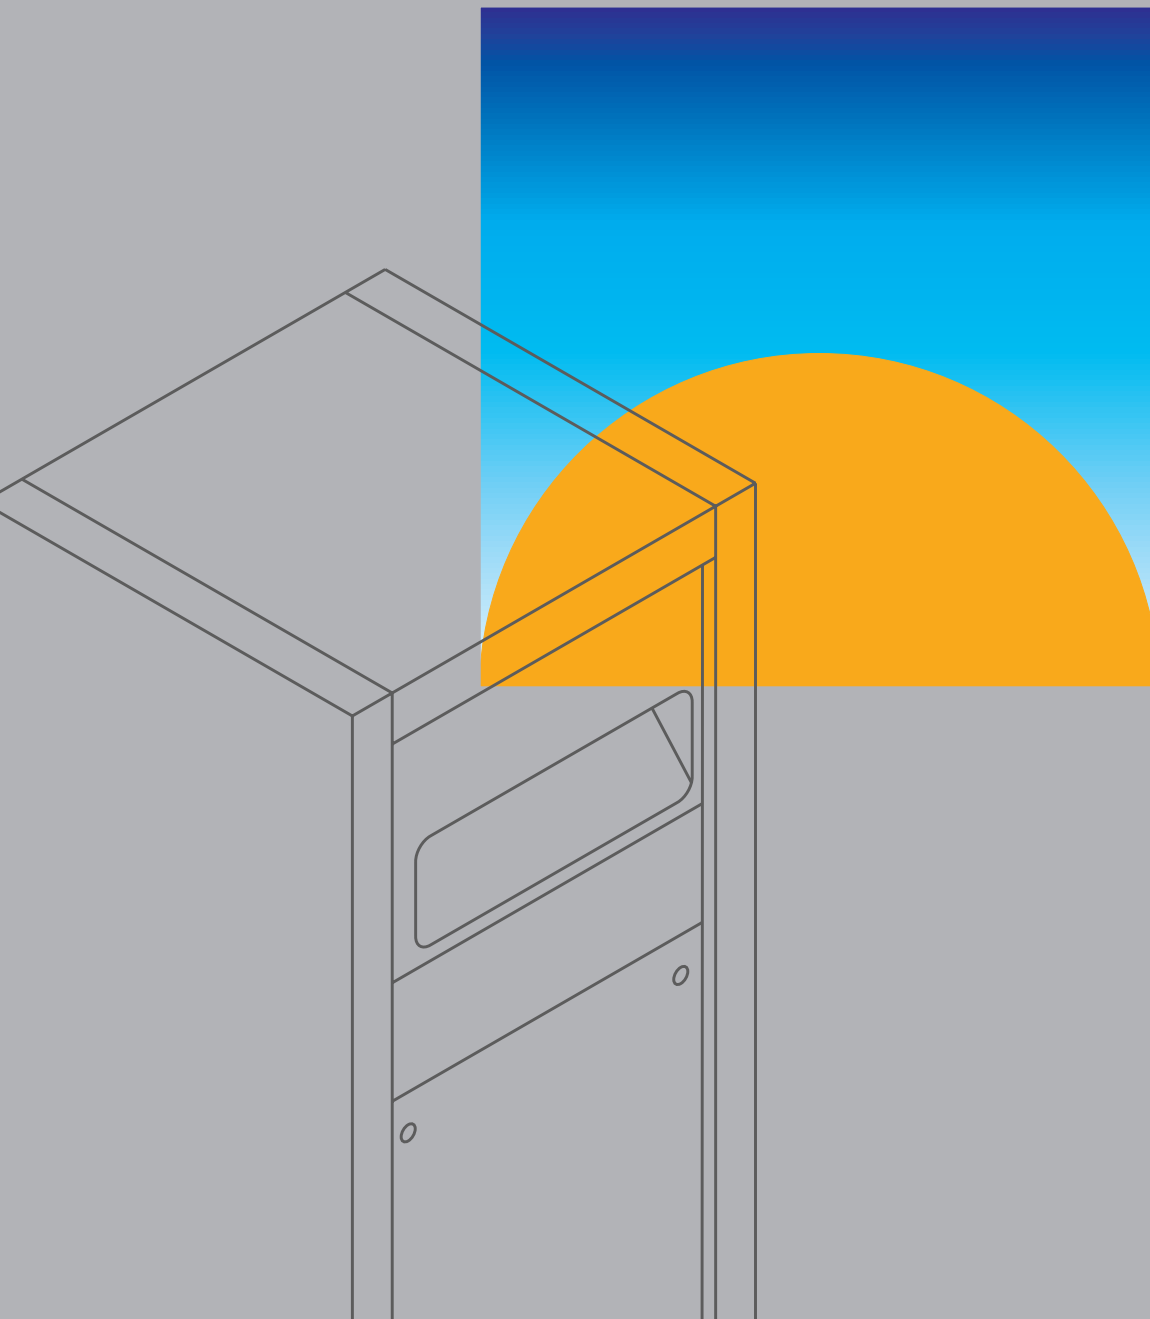


VITOGAS 50

With gray cast-iron heat exchanger surface

Atmospheric gas-fired hot water heating boiler

Rated input: 65 to 200 MBH

Impressive performance in an economical and compact design. The Vitogas 50, EC Series feature space-saving construction, allowing for closet installation with minimal clearances.



Special gray cast-iron heat exchanger surface

The benefits at a glance:

- **High operational reliability and a long service life** thanks to the high-quality, gray cast-iron heat exchanger.
- **Efficient combustion and quiet operation** with large diameter, stainless steel burners, combustion efficiency 83%.
- **Two venting options:** the ECD, with a motorized vent damper for chimney venting and the ECV, with a built-in power venter for direct venting through an outside wall with a single-wall, stainless steel vent pipe system.
- **Problem-free transport** into difficult-to-access boiler rooms due to light weight and compact design.




Vitogas 50, ECD – for chimney venting



Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, ON • N2V 2G5 • Canada
Tel.: (519) 885-6300 Fax: (519) 885-0887

Viessmann Manufacturing Company (U.S.) Inc.
83 Vermont Avenue, Building #3
Warwick, RI • 02888 • U.S.A.
Tel.: (401) 732-0667 Fax: (401) 732-0590



| VITOGAS 50 | | Model | ECD- | 65 | 80 | 100 | 115 | 140 | 155 | 180 | 200 |
|--|--------|--------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Rated input | | | MBH | 65 | 80 | 100 | 115 | 140 | 155 | 180 | 200 |
| Total dimensions | Length | inches | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ |
| | Width | inches | 13½ | 13½ | 17 | 17 | 21 | 21 | 25 | 25 | |
| | Height | inches | 40¾ | 40¾ | 40¾ | 40¾ | 40¾ | 40¾ | 40¾ | 40¾ | 40¾ |
| Weight (incl. insulation, burners and packaging) | | lbs | 233 | 233 | 285 | 285 | 345 | 345 | 423 | 423 | |
| Boiler water content | | USG | 2.6 | 2.6 | 3.5 | 3.5 | 4.3 | 4.3 | 7.1 | 7.1 | |

| VITOGAS 50 | | Model | ECV- | 65 | 80 | 100 | 115 | 140 | 155 | 180 | 200 |
|--|--------|--------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Rated input | | | MBH | 65 | 80 | 100 | 115 | 140 | 155 | 180 | 200 |
| Total dimensions | Length | inches | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ | 19¾ |
| | Width | inches | 13½ | 13½ | 17 | 17 | 21 | 21 | 25 | 25 | |
| | Height | inches | 39½ | 39½ | 39½ | 39½ | 39½ | 39½ | 39½ | 39½ | 39½ |
| Weight (incl. insulation, burners and packaging) | | lbs | 243 | 243 | 293 | 293 | 364 | 364 | 430 | 430 | |
| Boiler water content | | USG | 2.6 | 2.6 | 3.5 | 3.5 | 4.3 | 4.3 | 7.1 | 7.1 | |

Vitogas 50, ECV – for direct venting



Technical information subject to change without notice.